

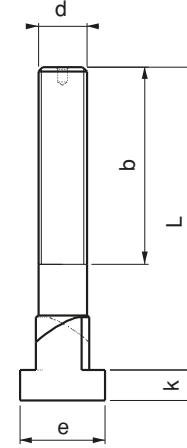


Referans Nr.	dx  x L	b	a	e	k	Sıkma Verileri Tightening Data		 (g)	
						Nm	kN		
1650-1214050		x50	35					70	
1650-1214080	M12x14	x80	55	13.7	22	8	141	74	100
1650-1214125		x125	75					120	
1650-1618063		x63	45					160	
1650-1618100	M16x18	x100	65	17.7	28	10	354	138	220
1650-1618160		x160	100					280	
1650-2022080		x80	55					330	
1650-2022125	M20x22	x125	85	21.7	35	14	679	215	430
1650-2022200		x200	120					570	
1650-2428100		x100	70					650	
1650-2428125	M24x28	x125	85	27.7	44	18	1163	310	770
1650-2428250		x250	150					1150	




Ürün Nr. 1650 Dereceli T-Ayaklı Saplama

- T-Kanal pleytlerde üstten T-Kanala girip bağlama özelliği vardır
- Kalite 12.9
- Siyah kaplama

Product Nr. 1650 Graded T-Slot Bolt

- In T-Slot plates it has the feature of making the coupling by entering T-Slot the top.
- Quality 12.9
- Black coating



Not: 150 °C üzerindeki ortamlarda sıkma işlemi yapılırken dişlerin üzerine Loctite 8150 kullanılır.



Loctite
8150

Note: Environments on the 150 °C when clamping action on the thread Loctite 8150 is used.