


**Vulkolon Yaylar**

**80 Shore**  
Maksimum esneme payı %30

**90 Shore**  
Maksimum esneme payı %25

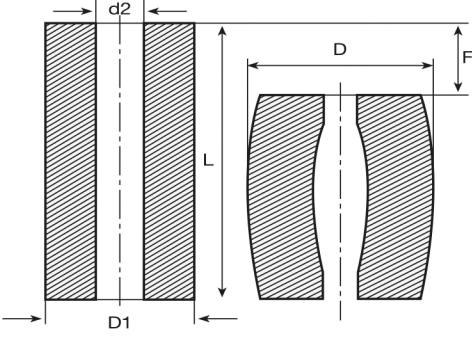

Vulkolon Yaylar Teknik Özellikleri

Sipariş Şekli : D1

D1	d2	L(mm)
Ø 16 mm	-	310
Ø 20 mm	-	310
Ø 20 mm	8,50	310
Ø 25 mm	-	310
Ø 25 mm	10,50	310
Ø 32 mm	-	310
Ø 32 mm	13,50	310
Ø 40 mm	-	310
Ø 40 mm	13,50	310
Ø 50 mm	-	310
Ø 50 mm	17	310
Ø 63 mm	-	310
Ø 63 mm	17	310
Ø 80 mm	-	310
Ø 80 mm	21	310
Ø 100 mm	-	310
Ø 100 mm	21	310
Ø 125 mm	-	310
Ø 125 mm	27	310

Poliüretan Yaylar Teknik Özellikleri Sipariş Şekli : D1

Teknik veri tablosuna göre **L (Tam Boy)** kullanılması tavsiye edilen uzunluktur. Shore sertliklerine göre esneme payları aşağıdaki tabloda belirtilmiştir.

D1 (Dış Çap)	d2 (Delik Çapı)	L (Tam Boy)	Sarı (80 Shore)			Kırmızı (90 Shore)		
			P Yük / kg	D Esn. Max. Çap	F Esn. Max. Boy	P Yük / kg	D Esn. Max. Çap	F Esn. Max. Boy
16	-	12	179	21	3,6	226	3	
		16	173	21	4,8	218	5	
		20	170	21	6,0	212	5	
		25	165	21	7,5	208	6,25	
		32	160	21	9,6	200	8	
20	8,5	12	274	26	3,6	334	3	
		16	270	26	4,8	330	5	
		20	260	26	6,0	324	5	
		25	254	26	7,5	320	6,25	
		32	250	26	9,6	308	8	
25	10,5	16	437	33	4,8	540	4	
		20	425	33	6,0	530	5	
		25	412	33	7,5	520	6,25	
		32	40	33	9,6	510	8	
		40	380	33	12,0	50	10	
32	13,5	50	365	42	15,0	480	12,50	
		16	730	42	4,8	930	4	
		20	720	42	6,0	900	5	
		25	690	42	7,5	880	6,25	
		32	670	42	9,6	850	8	
40	13,5	40	650	42	12,0	820	10	
		50	635	42	15,0	810	12,50	
		20	1280	52	6,0	1620	5	
		25	1260	52	7,5	1550	6,25	
		32	1180	52	9,6	1500	8	
50	17	40	1170	52	12,0	1450	10	
		50	1120	52	15,0	1410	12,50	
		69	1100	52	18,9	1380	15,75	
		25	1980	65	7,5	2500	6,25	
		32	1910	65	9,6	2400	8	
63	17	40	1850	65	12,0	2300	10	
		50	1810	65	15,0	2250	12,50	
		63	1760	65	18,9	2200	15,75	
		80	1730	65	24,0	2150	20	
		32	3400	82	9,6	4200	9	
80	21	40	3200	82	12,0	4050	10	
		50	3100	82	15,0	3900	12,50	
		63	3000	82	18,9	3800	15,75	
		80	2900	82	24,0	3700	20	
		100	2800	82	30,0	3600	25	
100	21	40	5500	104	12,0	6900	10	
		50	5250	104	15,0	6600	12,50	
		63	5050	104	18,9	6400	15,75	
		80	4900	104	24,0	6200	20	
		100	4750	104	30,0	6000	25	
125	27	125	4650	130	37,5	5800	31,25	
		50	9000	130	15,0	1300	12,50	
		63	8600	130	18,9	10800	15,75	
		80	8250	130	24,0	10400	20	
		100	8000	130	30,0	10000	25	
125	27	125	7600	160	37,5	9700	31,25	
		160	7500	160	48,0	9500	40	
		63	14200	160	18,9	17600	15,75	
		80	13200	160	24,0	16800	20	
125	27	100	12800	160	30,0	16000	25	
		125	12400	160	37,5	15300	31,25	
160	12000	160	48,0	15000	40			